

EMT Connector Compression Type

Steel - Zinc plated

ELECMAN® Steel EMT Connector Compression Type is a specialized fitting used in electrical installations to connect Electrical Metallic Tubing (EMT) to electrical boxes, panels, or other enclosures.

Material:

Steel

Type:

Compression type

Surface Finish:

Zinc plated

Thickness of plating:

The average thickness of plating is 12.7um, the minimum thickness of plating is 10.2um.

Certification & Standard

Certification:

Manufactured to Underwriters Laboratory

Safety Standards UL 514B

UL File No.: E513114



Dimensions:

The dimensions of steel EMT connectors compression type are as indicated in Table 2.

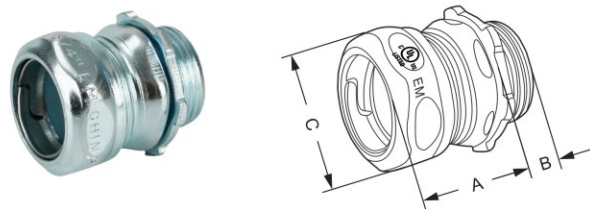


Table 2 - Dimensions of Steel EMT Connectors Compression Type

Catalog Number	Trade Size		Dim A	Dim B	Dim C
	in.	mm	in.	in.	in.
SCCN050	1/2"	16	0.625	0.438	1.125
SCCN075	3/4"	21	0.688	0.438	1.375
SCCN100	1"	27	0.688	0.500	1.688
SCCN125	1-1/4"	35	0.938	0.688	2.063
SCCN150	1-1/2"	41	1.063	0.688	2.250
SCCN200	2"	53	1.125	0.750	2.750
SCCN250	2-1/2"	63	1.688	0.813	3.625
SCCN300	3"	78	1.688	0.938	4.250
SCCN325	3-1/2"	91	1.813	1.000	4.688
SCCN400	4"	103	1.813	1.000	5.188

Packing information:

The packing information of steel EMT connectors compression type are as indicated in Table 1.

Table 1 - Packing Information of Steel EMT Connector Compression Type

Catalog Number	Trade Size		Inner Pack	Master Pack	Weight/C	Volume/C
	in.	mm	pcs	pcs	kgs	cbm
SCCN050	1/2"	16	50	500	26.20	0.024
SCCN075	3/4"	21	25	250	17.20	0.022
SCCN100	1"	27	50	200	20.40	0.022
SCCN125	1-1/4"	35	25	100	16.90	0.024
SCCN150	1-1/2"	41	10	40	8.20	0.013
SCCN200	2"	53	5	20	5.40	0.009
SCCN250	2-1/2"	63		12	8.42	0.011
SCCN300	3"	78		12	10.70	0.015
SCCN325	3-1/2"	91		6	6.00	0.012
SCCN400	4"	103		6	7.00	0.014