

EMT Coupling Set Screw Type

Steel - With insulated throat - Zinc plated

ELECMAN® Steel EMT Connector Compression Type with Insulated Throat is a specialized electrical fitting designed to connect Electrical Metallic Tubing (EMT) to boxes, enclosures, or other electrical equipment.

Material:

Steel

Type:

Compression type

Surface Finish:

Zinc plated

Thickness of plating:

The average thickness of plating is 12.7um, the minimum thickness of plating is 10.2um.

Certification & Standard

Certification:

Manufactured to Underwriters Laboratory Safety Standards UL 514B
UL File No.: E513114



Packing information:

The packing information of steel EMT connectors compression type with insulated throat are as indicated in Table 1.

Dimensions:

The dimensions of steel EMT connectors set compression type with insulated throat are as indicated in Table 2.

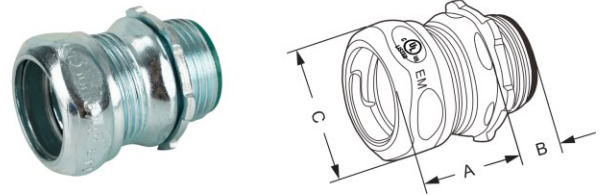


Table 2 - Dimensions of Steel EMT Connectors Compression Type with insulated throat

Catalog Number	Trade Size		Dim A	Dim B	Dim C
	in.	mm	in.	in.	in.
ISCCN050	1/2"	16	0.625	0.500	1.125
ISCCN075	3/4"	21	0.688	0.500	1.375
ISCCN100	1"	27	0.688	0.562	1.688
ISCCN125	1-1/4"	35	0.938	0.767	2.063
ISCCN150	1-1/2"	41	1.063	0.767	2.250
ISCCN200	2"	53	1.125	0.829	2.750
ISCCN250	2-1/2"	63	1.688	0.923	3.625
ISCCN300	3"	78	1.688	1.048	4.250
ISCCN325	3-1/2"	91	1.813	1.110	4.688
ISCCN400	4"	103	1.813	1.110	5.188

Table 1 - Packing Information of Steel EMT Connector Compression Type with Insulated Throat

Catalog Number	Trade Size		Inner Pack	Master Pack	Weight/C	Volume/C
	in.	mm	pcs	pcs	kgs	cbm
ISCCN050	1/2"	16	50	500	26.25	0.024
ISCCN075	3/4"	21	25	250	17.25	0.022
ISCCN100	1"	27	50	200	20.45	0.022
ISCCN125	1-1/4"	35	25	100	16.95	0.024
ISCCN150	1-1/2"	41	10	40	8.25	0.013
ISCCN200	2"	53	5	20	5.45	0.009
ISCCN250	2-1/2"	63		12	8.47	0.011
ISCCN300	3"	78		12	10.75	0.015
ISCCN325	3-1/2"	91		6	6.05	0.012
ISCCN400	4"	103		6	7.05	0.014