

EMT Coupling Compression Type

Steel - Zinc plated

ELECMAN® Steel EMT Coupling Compression Type is an essential fitting used in electrical installations to securely connect two lengths of Electrical Metallic Tubing (EMT).

Material:

Steel

Type:

Compression type

Surface Finish:

Zinc plated

Thickness of plating:

The average thickness of plating is 12.7um, the minimum thickness of plating is 10.2um.

Certification & Standard

Certification:

Manufactured to Underwriters Laboratory Safety Standards UL 514B
UL File No.: E513114



Packing information:

The packing information of steel EMT couplings compression type are as indicated in Table 1.

Dimensions:

The dimensions of steel EMT couplings compression type are as indicated in Table 2.

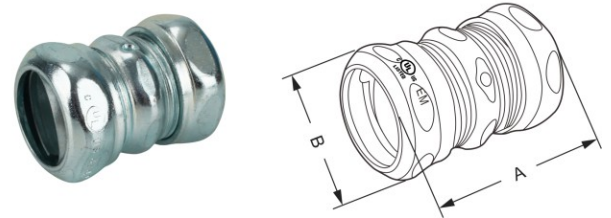


Table 2 - Dimensions of Steel EMT Couplings Compression Type

Catalog Number	Trade Size		Dim A	Dim B
	in.	mm	in.	in.
SCCP050	1/2"	16	1.625	1.125
SCCP075	3/4"	21	1.750	1.375
SCCP100	1"	27	1.875	1.688
SCCP125	1-1/4"	35	2.250	2.063
SCCP150	1-1/2"	41	2.250	2.250
SCCP200	2"	53	2.375	2.750
SCCP250	2-1/2"	63	3.875	3.625
SCCP300	3"	78	4.000	4.250
SCCP325	3-1/2"	91	4.063	4.688
SCCP400	4"	103	4.938	5.188

Table 1 - Packing Information of Steel EMT Couplings Compression Type

Catalog Number	Trade Size		Inner Pack	Master Pack	Weight/C	Volume/C
	in.	mm	pcs	pcs	kgs	cbm
SCCP050	1/2"	16	50	500	35.50	0.028
SCCP075	3/4"	21	25	250	22.20	0.025
SCCP100	1"	27	50	200	25.10	0.024
SCCP125	1-1/4"	35	25	100	20.50	0.026
SCCP150	1-1/2"	41	10	40	9.30	0.013
SCCP200	2"	53	5	20	6.00	0.011
SCCP250	2-1/2"	63		12	10.20	0.012
SCCP300	3"	78		12	13.05	0.018
SCCP325	3-1/2"	91		6	7.60	0.014
SCCP400	4"	103		6	9.34	0.017