

Raintight EMT Connector Compression Type

Steel - With insulated throat - Zinc plated

ELECMAN® Steel raintight EMT connector with a compression type and insulated throat is a specialized electrical fitting used to connect EMT conduit to electrical boxes or enclosures.

Material:

Steel

Type:

Compression type

Surface Finish:

Zinc plated

Thickness of plating:

The average thickness of plating is 12.7um, the minimum thickness of plating is 10.2um.

Certification & Standard

Certification:

Manufactured to Underwriters Laboratory Safety Standards UL 514B
UL File No.: E513114



Packing information:

The packing information of Raintight EMT Connectors Compression Type are as indicated in Table 1.

Dimensions:

The dimensions of Raintight EMT Connectors Compression Type are as indicated in Table 2.

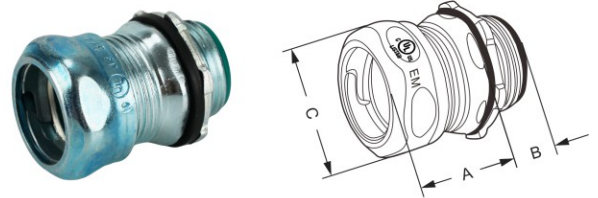


Table 2 - Dimensions of Raintight EMT Connectors Compression Type

Catalog Number	Trade Size		Dim A	Dim B	Dim C
	in.	mm	in.	in.	in.
IRTON050	1/2"	16	0.625	0.500	1.125
IRTON075	3/4"	21	0.688	0.500	1.375
IRTON100	1"	27	0.688	0.562	1.688
IRTON125	1-1/4"	35	0.938	0.767	2.063
IRTON150	1-1/2"	41	1.063	0.767	2.250
IRTON200	2"	53	1.125	0.829	2.750
IRTON250	2-1/2"	63	1.688	0.923	3.625
IRTON300	3"	78	1.688	1.048	4.250
IRTON350	3-1/2"	91	1.813	1.110	4.688
IRTON400	4"	103	1.813	1.110	5.188

Table 1 - Packing Information of Raintight EMT Connectors Compression Type

Catalog Number	Trade Size		Inner Pack	Master Pack	Weight/C	Volume/C
	in.	mm	pcs	pcs	kgs	cbm
IRTON050	1/2"	16	50	500	28.03	0.024
IRTON075	3/4"	21	25	250	19.01	0.020
IRTON100	1"	27	20	200	22.00	0.025
IRTON125	1-1/4"	35	10	100	17.76	0.022
IRTON150	1-1/2"	41	10	100	20.81	0.028
IRTON200	2"	53	5	50	14.22	0.025
IRTON250	2-1/2"	63		8	5.60	0.007
IRTON300	3"	78		6	5.40	0.008
IRTON350	3-1/2"	91		4	4.30	0.007
IRTON400	4"	103		4	5.01	0.009