

Raintight EMT Coupling Compression Type

Steel - Zinc plated

ELECMAN® Steel raintight EMT (Electrical Metallic Tubing) coupling of the compression type is a crucial component in electrical installations, particularly in environments where exposure to moisture is a concern.

Material:

Steel

Type:

Compression type

Surface Finish:

Zinc plated

Thickness of plating:

The average thickness of plating is 12.7um, the minimum thickness of plating is 10.2um.

Certification & Standard

Certification:

Manufactured to Underwriters Laboratory Safety Standards UL 514B
UL File No.: E513114



Packing information:

The packing information of Raintight EMT Connector Compression Type are as indicated in Table 1.

Dimensions:

The dimensions of Raintight EMT Connector Compression Type are as indicated in Table 2.

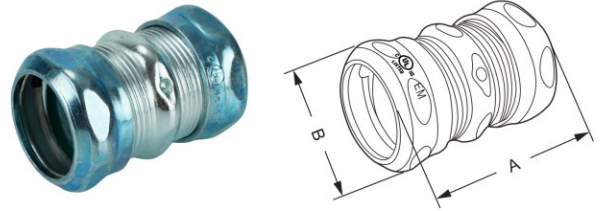


Table 2 - Dimensions of Raintight EMT Connector Compression Type

Catalog Number	Trade Size		Dim A	Dim B
	in.	mm	in.	in.
RTOP050	1/2"	16	1.625	1.125
RTOP075	3/4"	21	1.750	1.375
RTOP100	1"	27	1.875	1.688
RTOP125	1-1/4"	35	2.250	2.063
RTOP150	1-1/2"	41	2.250	2.250
RTOP200	2"	53	2.375	2.750
RTOP250	2-1/2"	63	3.875	3.625
RTOP300	3"	78	4.000	4.250
RTOP350	3-1/2"	91	4.063	4.688
RTOP400	4"	103	4.938	5.188

Table 1 - Packing Information of Raintight EMT Connector Compression Type

Catalog Number	Trade Size		Inner Pack	Master Pack	Weight/C	Volume/C
	in.	mm	pcs	pcs	kgs	cbm
RTOP050	1/2"	16	50	500	35.62	0.030
RTOP075	3/4"	21	25	250	23.95	0.023
RTOP100	1"	27	20	200	27.38	0.031
RTOP125	1-1/4"	35	10	100	20.43	0.025
RTOP150	1-1/2"	41	10	100	24.40	0.031
RTOP200	2"	53	5	50	15.98	0.028
RTOP250	2-1/2"	63		8	6.69	0.009
RTOP300	3"	78		6	6.50	0.010
RTOP350	3-1/2"	91		4	5.29	0.010
SCON400	4"	103		4	6.45	0.012