

EMT Connector Set Screw Type

Steel - With insulated throat - Zinc plated

ELECMAN® Steel EMT Connector Set Screw Type with Insulated Throat is a specialized fitting used in electrical installations to connect Electrical Metallic Tubing (EMT) to junction boxes, enclosures, or other electrical fixtures.

Material:

Steel

Type:

Set screw type

Surface Finish:

Zinc plated

Thickness of plating:

The average thickness of plating is 12.7um, the minimum thickness of plating is 10.2um.

Certification & Standard

Certification:

Manufactured to Underwriters Laboratory Safety Standards UL 514B
UL File No.: E513114



Packing information:

The packing information of Steel EMT Connector Set Screw Type with Insulated Throat are as indicated in Table 1.

Dimensions:

The dimensions of steel EMT connectors set screw type with insulated throat are as indicated in Table 2.

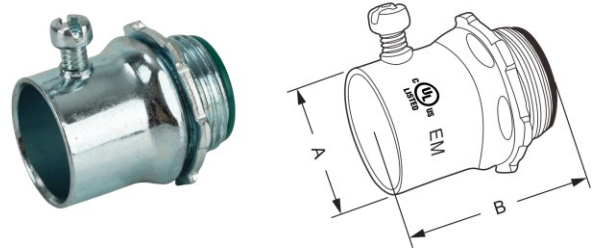


Table 2 - Dimensions of Steel EMT Connector Set Screw Type with Insulated Throat

Catalog Number	Trade Size		Dim A	Dim B
	in.	mm	in.	in.
ISCON050	1/2"	16	0.880	1.507
ISCON075	3/4"	21	1.130	1.566
ISCON100	1"	27	1.380	1.815
ISCON125	1-1/4"	35	1.380	2.389
ISCON150	1-1/2"	41	2.750	2.329
ISCON200	2"	53	2.000	2.459
ISCON250	2-1/2"	63	3.440	3.300
ISCON300	3"	78	3.130	3.920
ISCON325	3-1/2"	91	4.750	4.420
ISCON400	4"	103	4.250	4.990

Table 1 - Packing Information of Steel EMT Connector Set Screw Type with Insulated Throat

Catalog Number	Trade Size		Inner Pack	Master Pack	Weight/C	Volume/C
	in.	mm	pcs	pcs	kgs	cbm
ISCON050	1/2"	16	50	500	19.55	0.022
ISCON075	3/4"	21	25	250	13.00	0.017
ISCON100	1"	27	50	200	17.30	0.022
ISCON125	1-1/4"	35	25	100	16.20	0.021
ISCON150	1-1/2"	41	10	100	18.50	0.031
ISCON200	2"	53	5	50	12.50	0.025
ISCON250	2-1/2"	63		12	6.75	0.009
ISCON300	3"	78		12	8.80	0.012
ISCON325	3-1/2"	91		6	5.10	0.008
ISCON400	4"	103		6	5.80	0.012